

宁波华艺轴承有限公司

NINGBO HUAYI BEARING CO.,LTD

企业简介>>

宁波华艺轴承有限公司是一家专业生产零类深沟球轴承的厂家。工厂地址位于慈溪市掌起镇工业开发区，紧邻沈海高速和329国道，东靠宁波北仑港，北接杭州湾跨海大桥，交通极为便利。

工厂占地面积15000平方米，现有员工150人，拥有10多条全自动生产线，年产中小型深沟球轴承2000余万套。

公司拥有各种先进的生产设备，检测仪器；技术工艺先进，质量控制体系严格，管理体系完善。所生产的的轴承质量稳定，被广泛应用于汽车及摩托车，农业及矿山机械，家电及家具，玩具寄运动设备，电动工具等行业。产品配套供应国内多家工厂，并且出口到欧洲，美洲等几十个国家和地区，深受国内外客户欢迎。

公司成立十余年来，始终坚持“质量第一，客户至上”的方针，不断发展壮大。面对激烈的市场竞争，我们将继续秉承“挑战自我极限，追求卓越完善”的经营理念，携手新老客户，合作共赢，共创辉煌！



宁波华艺轴承有限公司

NINGBO HUAYI BEARING CO.,LTD

ABOUT US>>

NINGBO HUAYI BEARINGS CO., LTD, which was established in 2002, is a professional manufacture of deep groove ball bearings. The factory is located in Zhangqi Industry Area, Cixi City, near Ningbo port and not far from Shanghai.

Now we have more than 150 employees, 15 product lines. Our product capability is 20 million units per year and annual sales are about 10 million. Our company has automatic production equipments and testing instruments, advanced technology, strict quality control system. So the quality of bearings is high and stable. It is widely used in automotive and motorcycles, agricultural and mining machinery, home appliances and furniture, toys send sports equipment, power tools and other industries.

Our bearings are exported to many Europe, America countries and other countries. Same time we also supply the bearings to domestic factories. And products are very popular with customers.

Here we promise that we will adhering the principal of "Quality First, Customers First". Expecting to cooperate with you and create the brilliant future!





用途>> APPLICATION



轴承游隙 Bearing radial play

轴承内径 Bore diameter d (mm)		第二组 (C2) Group2		基本组 (0) Standard group		第三组 (C3) Group3		第四组 (C4) Group4		第五组 (C5) Group5	
超过 Over	到 To	最小 Min.	最大 Max.	最小 Min.	最大 Max.	最小 Min.	最大 Max.	最小 Min.	最大 Max.	最小 Min.	最大 Max.
2.5	6	0	7	2	13	8	23	14	29	20	37
6	10	0	7	2	13	8	23	14	29	20	37
10	18	0	9	3	18	11	25	18	33	25	45
18	24	0	10	5	20	13	28	20	36	28	48
24	30	1	11	5	20	13	28	23	41	30	53
30	40	1	11	6	20	15	33	28	46	40	64

P0级公差内圈 Tolerance P0 Inner ring (Abec-1)

1) 包括0.6在内。 2) 直径系列7,8无规定值。 1) Including 0.6 2) No specification for diameter serie 7,8

d MM		Δ_{dmp}		V_{dp2} 直径系列 Diameter series			V_{dmp}	K_{ia}	Δ_{bs}		V_{bs}
超过 Over	包括 Include	高 High	低 Low	9	0,1	2,3,4			高 High	低 Low	
0.6 ¹⁾	2.5	0	-8	10	8	6	6	10	0	-40	12
2.5	10	0	-8	10	8	6	6	10	0	-120	15
10	18	0	-8	10	8	6	6	10	0	-120	20
18	30	0	-10	13	10	8	8	13	0	-120	20
30	50	0	-12	15	12	9	9	15	0	-120	20

P0级公差外圈 Tolerance P0 Outer ring (Abec-1)


1) 包括2.5在内。 2) 直径系列7,8无规定值。 3) 直径系列9,0,1无规定值。 1) Including 2.5 2) No specification for diameter series 7,8 3) No specification for diameter series 9,0,1

D MM		Δ_{Dmp}		V_{Dp2} 开式轴承 Open Bearing / 闭式轴承 ¹⁾ Closed Bearing				V_{Dmp}	K_{es}	Δ_{Cs}		V_{Cs}
超过 Over	包括 Include	高 High	低 Low	直径系列 Diameter series		2,3,4	高 High			低 Low	最大 Max.	
2.5 ¹⁾	6	0	-8	10	8	6	10	6	15	与同一轴承内圈的 Δ_{bs} 及 Δ_{bs} 相同 Same as the one bearing's inner ring Δ_{bs} and Δ_{bs} .		
6	18	0	-8	10	8	6	10	6	15			
18	30	0	-9	12	9	7	12	7	15			
30	50	0	-11	14	11	8	16	8	20			
50	80	0	-13	16	13	10	20	10	25			
80	120	0	-15	19	19	11	26	11	35			

材质 轴承钢 Material GCr15

中国 CHINA	ISO	美国 USA	德国 GERMANY	日本 JAPAN	瑞典 SWEDEN
GCr15	638/XVII	52100 (ASTM)	100Cr6 (DIN)	SUJ2 (JIS)	SKF3



BALL BEARINGS -> new products

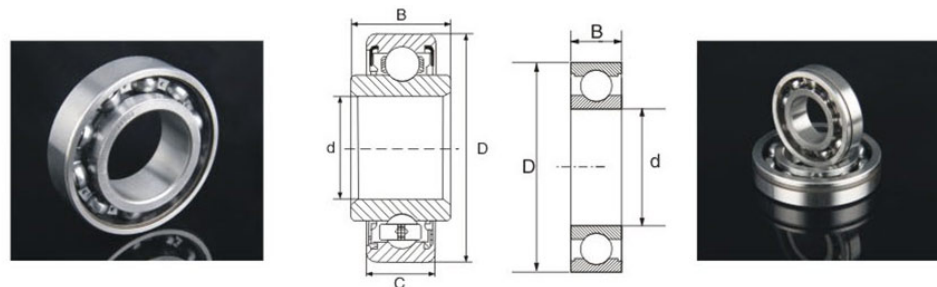

轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxrout Speed		参考重量 Weight Kg
	d	D	B	C	动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil			
	mm	in	mm	in	mm	mm	Cr	Cor	mm	r/min	R/min		
88505	25	0.9843	52	2.0472	15	16.8	14.00	7.85	9	7.938	13000	15000	0.20
88506	30	1.1811	62	2.4409	16	24	19.50	11.30	9	9.525	11000	13000	0.26
88507	35	1.3780	72	2.8346	17	25	25.70	15.30	9	11.112	9800	11000	0.35
88508A	40	1.5748	72	2.8346	17	22	29.10	17.80	9	12.000	8700	10000	0.32
88508	40	1.5748	80	3.1496	21	27	29.10	17.80	9	12.000	8700	10000	0.45
88509	45	1.7716	85	3.3465	21	27	32.50	20.40	10	12.000	7800	9200	0.50
88510	50	1.9685	90	3.5433	22	30	35.00	23.20	10	12.700	7100	8300	0.55
88107	35	1.3780	72	2.8346	17	25	25.70	15.30	9	11.112	9800	11000	0.35



轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxrout Speed		参考重量 Weight Kg
	d	D	B	C	动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil			
	mm	in	mm	in	mm	in	Cr	Cor	mm	r/min	R/min		
98205	25	0.9843	52	2.0472	9	0.3543	13.20	8.30	10	7.144	13000	15000	0.082
98206	30	1.1811	62	2.4409	10	0.3937	14.00	7.85	11	7.938	13000	15000	0.131
98305	25	0.9843	62	2.4409	12	0.4724	21.20	10.90	9	8.731	12000	15000	0.181
40204	20	0.7874	47	1.8504	12	0.4724	12.80	6.65	8	7.938	16000	18000	0.087
40205	25	0.9843	52	2.0472	12	0.4724	14.00	7.85	9	7.938	13000	15000	0.098

BALL BEARINGS->6000series





轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
605	5	0.1969	14	0.5512	5	0.1969	1.02	0.49	7	2.381	32000	40000	0.0035
606	6	0.2362	17	0.6693	6	0.2362	1.13	0.56	8	2.381	30000	38000	0.006
607	7	0.2756	19	0.7480	6	0.2362	2.01	1.05	6	3.50	28000	36000	0.008
608	8	0.3150	22	0.8661	7	0.2756	2.53	1.36	7	3.969	26000	34000	0.015
609	9	0.3543	24	0.9449	7	0.2756	2.57	1.36	7	3.969	24000	32000	0.016
6000	10	0.3937	26	1.0236	8	0.3150	4.55	1.95	7	4.763	29000	34000	0.019
6001	12	0.4724	28	1.1024	8	0.3150	5.10	2.39	8	4.763	26000	30000	0.022
6002	15	0.5906	32	1.2598	9	0.3543	5.60	2.84	9	4.763	22000	26000	0.030
6003	17	0.6693	35	1.378	10	0.3937	6.80	3.35	10	4.763	20000	24000	0.039
6004	20	0.7874	42	1.6535	12	0.4724	9.40	5.05	9	6.350	18000	21000	0.069
6005	25	0.9843	47	1.8504	12	0.4724	10.10	5.85	10	6.350	15000	18000	0.080
6006	30	1.1811	55	2.1645	13	0.5118	13.20	8.30	11	7.144	13000	15000	0.120
6007	35	1.3779	62	2.4409	14	0.5512	16.00	10.30	11	7.938	12000	14000	0.160
6008	40	1.5748	68	2.6772	15	0.5906	16.80	11.50	12	7.938	10000	12000	0.190
6009	45	1.7716	75	2.9528	16	0.6299	21.00	15.10	12	8.731	9200	11000	0.250
6010	50	1.965	80	3.1496	16	0.6299	21.80	16.60	13	8.731	8400	9800	0.260

BALL BEARINGS->6200series





轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
625	5	0.1969	16	0.6299	5	0.1969	1.13	0.56	8	2.381	32000	40000	0.005
626	6	0.2362	19	0.7480	6	0.2362	2.01	1.05	6	3.500	28000	36000	0.008
627	7	0.2756	22	0.8661	7	0.2756	2.53	1.36	7	3.969	26000	34000	0.014
628	8	0.3150	24	0.9449	8	0.3150	2.57	1.36	7	3.969	24000	32000	0.016
629	9	0.3543	26	1.0236	8	0.3150	3.52	1.95	7	4.763	22000	30000	0.019
6200	10	0.3973	30	1.1811	9	0.3543	5.10	2.39	8	4.763	25000	30000	0.032
6201	12	0.4724	32	1.2598	10	0.3937	6.10	2.75	7	5.953	22000	26000	0.037
6202	15	0.5906	35	1.3779	11	0.4331	7.75	3.60	8	5.953	19000	23000	0.045
6203	17	0.6693	40	1.5748	12	0.4724	9.60	4.60	8	6.747	18000	21000	0.065
6204	20	0.7874	47	1.8504	14	0.5512	12.80	6.65	8	7.938	16000	18000	0.110
6205	25	0.9843	52	2.0472	15	0.5906	14.00	7.85	9	7.938	13000	15000	0.130
6206	30	1.1811	62	2.4409	16	0.6299	19.50	11.30	9	9.525	11000	13000	0.200
6207	35	1.3779	72	2.8346	17	0.6693	25.70	15.30	9	11.112	9800	11000	0.290
6208	40	1.5748	80	3.1496	18	0.7087	29.10	17.80	9	12.000	8700	10000	0.370
6209	45	1.7716	85	3.3465	19	0.748	32.50	20.40	10	12.000	7800	9200	0.410
6210	50	1.965	90	3.5433	20	0.7841	35.00	23.20	10	12.700	7100	8300	0.460

BALL BEARINGS->6300series





轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
6300	10	0.3937	35	1.3779	11	0.4331	8.20	3.50	6	7.144	23000	27000	0.053
6301	12	0.4724	37	1.4567	12	0.4724	9.70	4.20	6	7.938	20000	24000	0.060
6302	15	0.5906	42	1.6535	13	0.5118	11.40	5.45	7	7.938	17000	21000	0.082
6303	17	0.6693	47	1.8504	14	0.5512	13.50	6.55	7	8.731	16000	19000	0.120
6304	20	0.7874	52	2.0472	15	0.5906	15.90	7.90	7	9.525	14000	17000	0.140
6305	25	0.9843	62	2.4409	17	0.6693	21.20	10.90	7	11.500	12000	14000	0.230
6306	30	1.1811	72	2.8346	19	0.748	26.70	15.00	8	12.000	10000	12000	0.350
6307	35	1.3779	80	3.1496	21	0.8268	33.50	19.10	8	13.494	8800	10000	0.460
6308	40	1.5748	90	3.5433	23	0.9055	40.50	24.00	8	15.081	7800	9200	0.630
6309	45	1.7716	100	3.937	25	0.9843	53.00	32.00	8	17.462	7000	8200	0.830
6310	50	1.965	110	4.3307	27	1.063	62.00	38.50	8	19.05	6400	7500	1.050

BALL BEARINGS->62200series





轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
62200	10	0.3937	30	1.1811	14	0.5512	5.10	2.39	8	4.763	25000	30000	0.04
62201	12	0.4724	32	1.2598	14	0.5512	6.10	2.75	7	5.953	22000	26000	0.045
62202	15	0.5906	35	1.378	14	0.5512	7.75	3.60	8	5.953	19000	23000	0.054
62203	17	0.6693	40	1.5748	16	0.6299	9.60	4.60	8	6.747	18000	21000	0.083
62204	20	0.7874	47	1.8504	18	0.7086	12.80	6.65	8	7.938	16000	18000	0.13
62205	25	0.9843	52	2.1645	18	0.7086	14.00	7.85	9	7.938	13000	15000	0.15
62206	30	1.1811	62	2.4409	20	0.7874	19.50	11.30	9	9.525	11000	13000	0.24
62207	35	1.3779	72	2.8346	23	0.9055	25.70	15.30	9	11.112	9800	11000	0.37
62208	40	1.5748	80	3.1496	23	0.9055	29.10	17.80	9	12.000	8700	10000	0.44
62209	45	1.7716	85	3.3464	23	0.9055	32.50	20.40	10	12.000	7800	9200	0.48
62210	50	1.965	90	3.5464	23	0.9055	35.00	23.20	10	12.700	7100	8300	0.52

BALL BEARINGS->62300series



轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
62300	10	0.3937	35	1.3780	17	0.6693	8.20	3.50	6	7.144	23000	27000	0.073
62301	12	0.4724	37	1.4567	17	0.6693	9.70	4.20	6	7.938	20000	24000	0.0814
62302	15	0.5906	42	1.6535	17	0.6693	11.40	5.45	7	7.938	17000	21000	0.105
62303	17	0.6693	47	1.8504	19	0.7480	13.50	6.55	7	8.731	16000	19000	0.146
62304	20	0.7874	52	2.0447	21	0.8276	15.90	7.90	7	9.525	14000	17000	0.195
62305	25	0.9843	62	2.4409	24	0.9448	21.20	10.90	7	11.500	12000	14000	0.306
62306	30	1.1811	72	2.8346	27	1.0630	26.70	15.00	7	12.000	10000	12000	0.478
62307	35	1.3779	80	3.1496	31	1.2204	33.50	19.10	8	13.494	8800	10000	0.647
62308	40	1.5748	90	3.5433	33	1.2992	40.50	24.00	8	15.081	7800	9200	0.885
62309	45	1.7716	100	3.9370	36	1.4173	53.00	32.00	8	17.462	7000	8200	1.156
62310	50	1.9685	110	4.3307	40	1.5748	62.00	38.50	8	19.050	6400	7500	1.498

BALL BEARINGS->63001series



轴承型号 Bearing No.	孔径 Bore		外径 O.D		宽度 Width		额定载荷 (KN) Load Rating		钢球参数 Ball Complement		极限转速 Maxronout Speed		参考重量 Weight Kg
	d		D		B		动负荷 Dynamic	静负荷 Static	数量 No.	尺寸 Size	脂 Grease	油 Oil	
	mm	in	mm	in	mm	in	Cr	Cor		mm	r/min	R/min	
63000	10	0.3937	26	1.0236	12	0.4724	4.62	1.96	7	4.763	26000	30000	0.025
63001	12	0.4724	28	1.1024	12	0.4724	5.10	2.39	8	4.763	26000	30000	0.029
63002	15	0.5906	32	1.2598	13	0.5118	5.60	2.84	9	4.763	22000	26000	0.039
63003	17	0.6693	35	1.378	14	0.5512	6.80	3.35	10	4.763	20000	24000	0.052
63004	20	0.7874	42	1.6535	16	0.6299	9.40	5.05	9	6.350	18000	21000	0.086
63005	25	0.9843	47	1.8504	16	0.6299	10.10	5.58	10	6.350	15000	18000	0.100
63006	30	1.1811	55	2.1645	19	0.7480	13.20	8.30	11	7.144	13000	15000	0.160
63007	35	1.378	62	2.4409	20	0.7874	16.00	10.30	11	7.938	12000	14000	0.210
63008	40	1.5748	68	2.6772	21	0.8268	16.80	11.50	12	7.938	10000	12000	0.260
63009	45	1.7716	75	2.9528	23	0.9055	20.80	14.60	12	8.731	5600	6600	0.340
63010	50	1.9685	80	3.496	23	0.9055	21.60	16.00	13	8.731	5000	6000	0.370